



Front and side view

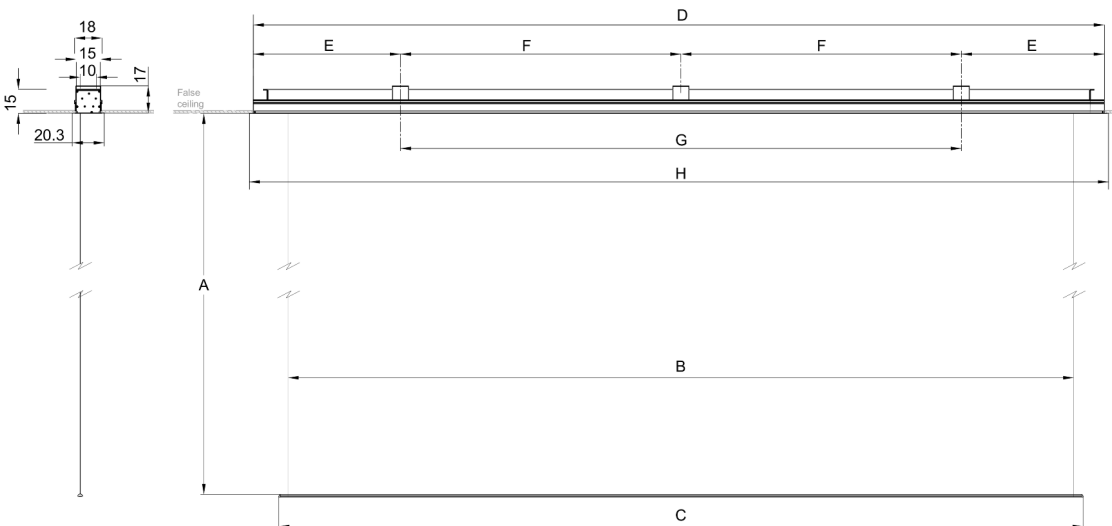

- A Fabric height
- B Fabric width
- C Weighing bar length
- D Profile length
- E Ideal position of brackets
- F Ideal position of brackets (screen of 3m and more)
- G Fixing center distance
- H Overall length of the underface

CEILING CUT
(B+37 cm) x 18 cm

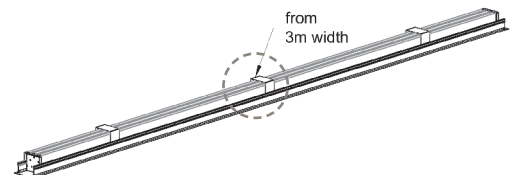

Technical data

Other DIMENSIONS,
FABRICS,
COLORS
on request

Reference	A cm	B cm	C cm	D cm	E cm	F	G	H cm
4:3 format								
OP1B1180240	180	240	255	274,3	< 25 cm	-	adjustable	279,6
OP1B1202270	202	270	285	304,3	< 25 cm	-	adjustable	309,6
OP1B1225300	225	300	315	334,3	< 25 cm	centered	adjustable	339,6
OP1B1263350	263	350	365	384,3	< 25 cm	centered	adjustable	389,6
OP1B1300400	300	400	415	434,3	< 25 cm	centered	adjustable	439,6
OP1B1375500	375	500	515	534,3	< 25 cm	centered	adjustable	539,6
16:10 format								
OP1B1150240	150	240	255	274,3	< 25 cm	-	adjustable	279,6
OP1B1169270	169	270	285	304,3	< 25 cm	-	adjustable	309,6
OP1B1187300	187	300	315	334,3	< 25 cm	centered	adjustable	339,6
OP1B1219350	219	350	365	384,3	< 25 cm	centered	adjustable	389,6
OP1B1250400	250	400	415	434,3	< 25 cm	centered	adjustable	439,6
OP1B1312500	312	500	515	534,3	< 25 cm	centered	adjustable	539,6
Square format								
OP1B1240240	240	240	255	274,3	< 25 cm	-	adjustable	279,6
OP1B1270270	270	270	285	304,3	< 25 cm	-	adjustable	309,6
OP1B1300300	300	300	315	334,3	< 25 cm	centered	adjustable	339,6
OP1B1350350	350	350	365	384,3	< 25 cm	centered	adjustable	389,6
OP1B1400400	400	400	415	434,3	< 25 cm	centered	adjustable	439,6

OPTION : MOUNTING SET
1m thread rods and mounting S


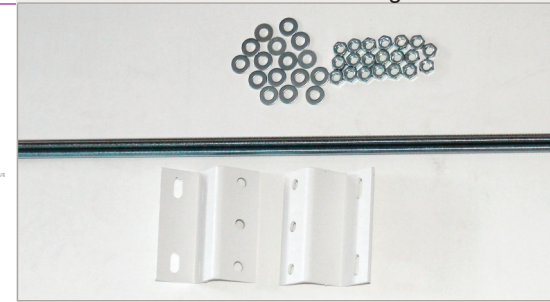


Image base < 300 cm : OPTKITOP2
Image base ≥ 300 cm : OPTKITOP3

All-in-one solution for an easy and aesthetic recessed installation. In addition to its reliability, this top of the range screen offers you a full screen image format.

- Fire resistant projection surface M1
- The weighing bar closes the whole case in stand-up position
- Remote control in option
- Wired switch included
- Motor on the right

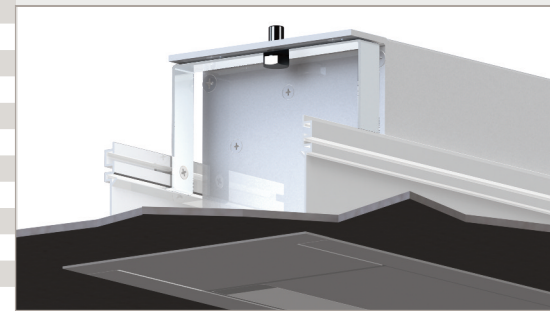

Chemin de Beaufrepaire - CS 42005
91410 DOURDAN - FRANCE
Tel +33 1 64 59 94 54